
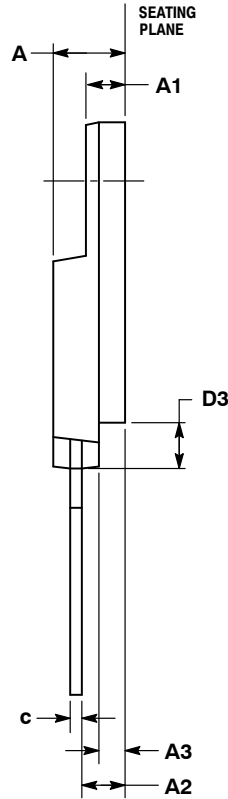


**TO-3PF-3L**  
**CASE 340AH**  
**ISSUE A**

DATE 09 JAN 2015

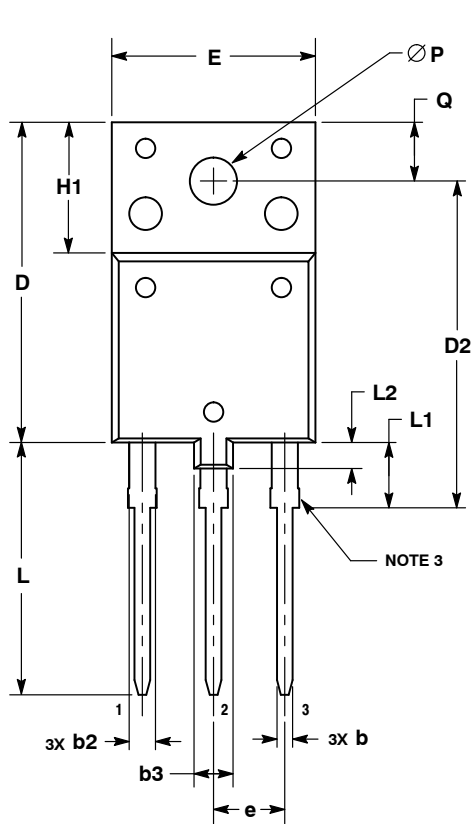

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. CONTOUR UNCONTROLLED IN THIS AREA (6 PLACES).
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.13 PER SIDE. THESE DIMENSIONS ARE TO BE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
5. DIMENSION b2 DOES NOT INCLUDE DAMBAR PROTRUSION. LEAD WIDTH INCLUDING PROTRUSION SHALL NOT EXCEED 2.20.

| DIM | MILLIMETERS |       |
|-----|-------------|-------|
|     | MIN         | MAX   |
| A   | 5.30        | 5.70  |
| A1  | 2.80        | 3.20  |
| A2  | 3.10        | 3.50  |
| A3  | 1.80        | 2.20  |
| b   | 0.65        | 0.95  |
| b2  | 1.90        | 2.15  |
| b3  | 3.80        | 4.20  |
| c   | 0.80        | 1.10  |
| D   | 24.30       | 24.70 |
| D2  | 24.70       | 25.30 |
| D3  | 3.30        | 3.70  |
| E   | 15.30       | 15.70 |
| e   | 5.35        | 5.55  |
| H1  | 9.80        | 10.20 |
| L   | 19.10       | 19.50 |
| L1  | 4.80        | 5.20  |
| L2  | 1.90        | 2.20  |
| P   | 3.40        | 3.80  |
| Q   | 4.30        | 4.70  |

|                         |                    |   |
|-------------------------|--------------------|---|
| <b>DOCUMENT NUMBER:</b> | <b>98AON79755E</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>TO-3PF-3L</b>   | <b>PAGE 1 OF 1</b>  |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.