
**DATE 30 OCT 2007** 



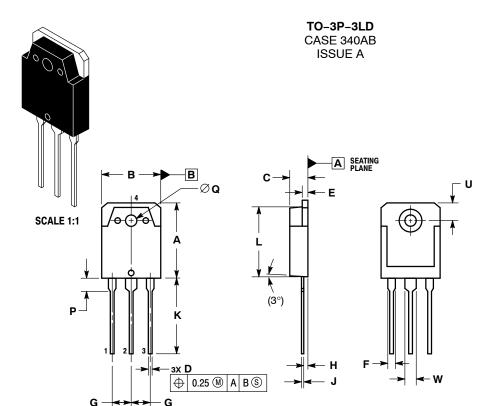


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- Y 14.5M, 1994.

  2. CONTROLLING DIMENSION: MILLIMETERS

  3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30mm FROM THE TERMINAL TIP.
- DIMENSION A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS			
DIM	MIN	NOM	MAX	
Α	19.70	19.90	20.10	
В	15.40	15.60	15.80	
С	4.60	4.80	5.00	
D	0.80	1.00	1.20	
Е	1.45	1.50	1.65	
F	1.80	2.00	2.20	
G	5.45 BSC			
Н	1.20	1.40	1.60	
J	0.55	0.60	0.75	
K	19.80	20.00	20.20	
L	18.50	18.70	18.90	
P	3.30	3.50	3.70	
Q	3.10	3.20	3.50	
U	5.00 REF			
W	2.80	3.00	3.20	

## **GENERIC MARKING DIAGRAM\***



XXXXX = Specific Device Code = Pb-Free Package G Α = Assembly Location

Υ = Year WW = Work Week

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G", may or not be present.

## STYLE 1: PIN 1. BASE 2. COLLECTOR

- EMITTER COLLECTOR

STYLE 2: ANODE CATHODE 2. ANODE CATHODE

STYLE 3: PIN 1. GATE 2. DRAIN SOURCE DRAIN

DOCUMENT NUMBER:	98AON25095D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	TO-3P-3LD		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves brisefin and of 160 m are trademarked so defined values of services and of the confined values and of the values of the confined values and of the values of the confined values and of the values of the v special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.